

W-606**W-606A**

SUPER I/O CARD (IDE+FDC+2S/1P/1G)

R1.0**USER'S MANUAL**

- A. WINBOND CHIPS: 83757+83758
 B. GAME PORT CAN DISABLE OR ENABLE
 C. "▲" → ARE NORMAL SETTING [DEFAULT]
 D. JUMPER SETTING:

JP1 FDD CONNECTOR	JP5 COM-2
JP2 IDE CONNECTOR	JP6 PRINTER PORT
JP3 GAME PORT	JP7 LED CONNECTOR
JP4 COM-1	JP8 ▲ SHORT - PRINTER AS O/P PORT OPEN - PRINTER AS I/O PORT

JP9 (1-3) A,B CHG (FDD)	(7-9) FDC
H A,B CHG'MODE	H DISABLE
▲ L NORMAL	▲ L ENABLE

(4-6) IDE
 H DISABLE
 ▲ L ENABLE

JP10	1	2	RS232-1	5	6	PRINTER
	H	H	COM4 (2E8H)	H	H	LPT3 (3BCH)
	▲ H	L	COM1 (3F8H)	H	L	LPT2 (278H)
	L	H	COM3 (3E8H)	▲ L	H	LPT1 (378H)
	L	L	DISABLE	L	L	DISABLE


3 4 RS232-2
 H H COM3 (3E8H)
 ▲ H L COM2 (2F8H)
 L H COM4 (2E8H)
 L L DISABLE

JP11	1	2	3	RS232-1	7	8	PRINTER
	▲ ON			IRQ4	▲ ON		IRQ7
		ON		IRQ3		ON	IRQ5
			ON	IRQ5			
		4	5	6	RS232-2		
	▲ ON				IRQ3		
		ON			IRQ4		
			ON		IRQ5		

JP15 GAME PORT: ▲ 1-2 ENABLE GAME PORT L
 2-3 DISABLE GAME PORT H


JP17 ON: ALE DATA FOR OLD HDD 28 PIN DATA
 ▲ OFF: CSEL DATA FOR NEW HDD 28 PIN DATA (DEFAULT)


LAYOUT BOARD

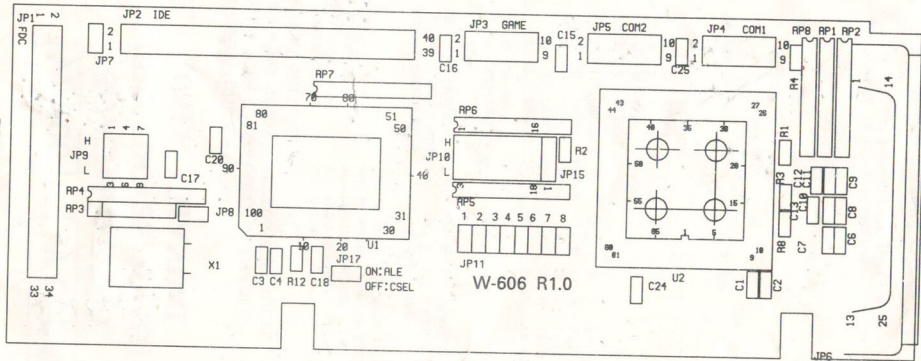

W-606 R1.0

Printed in Taiwan

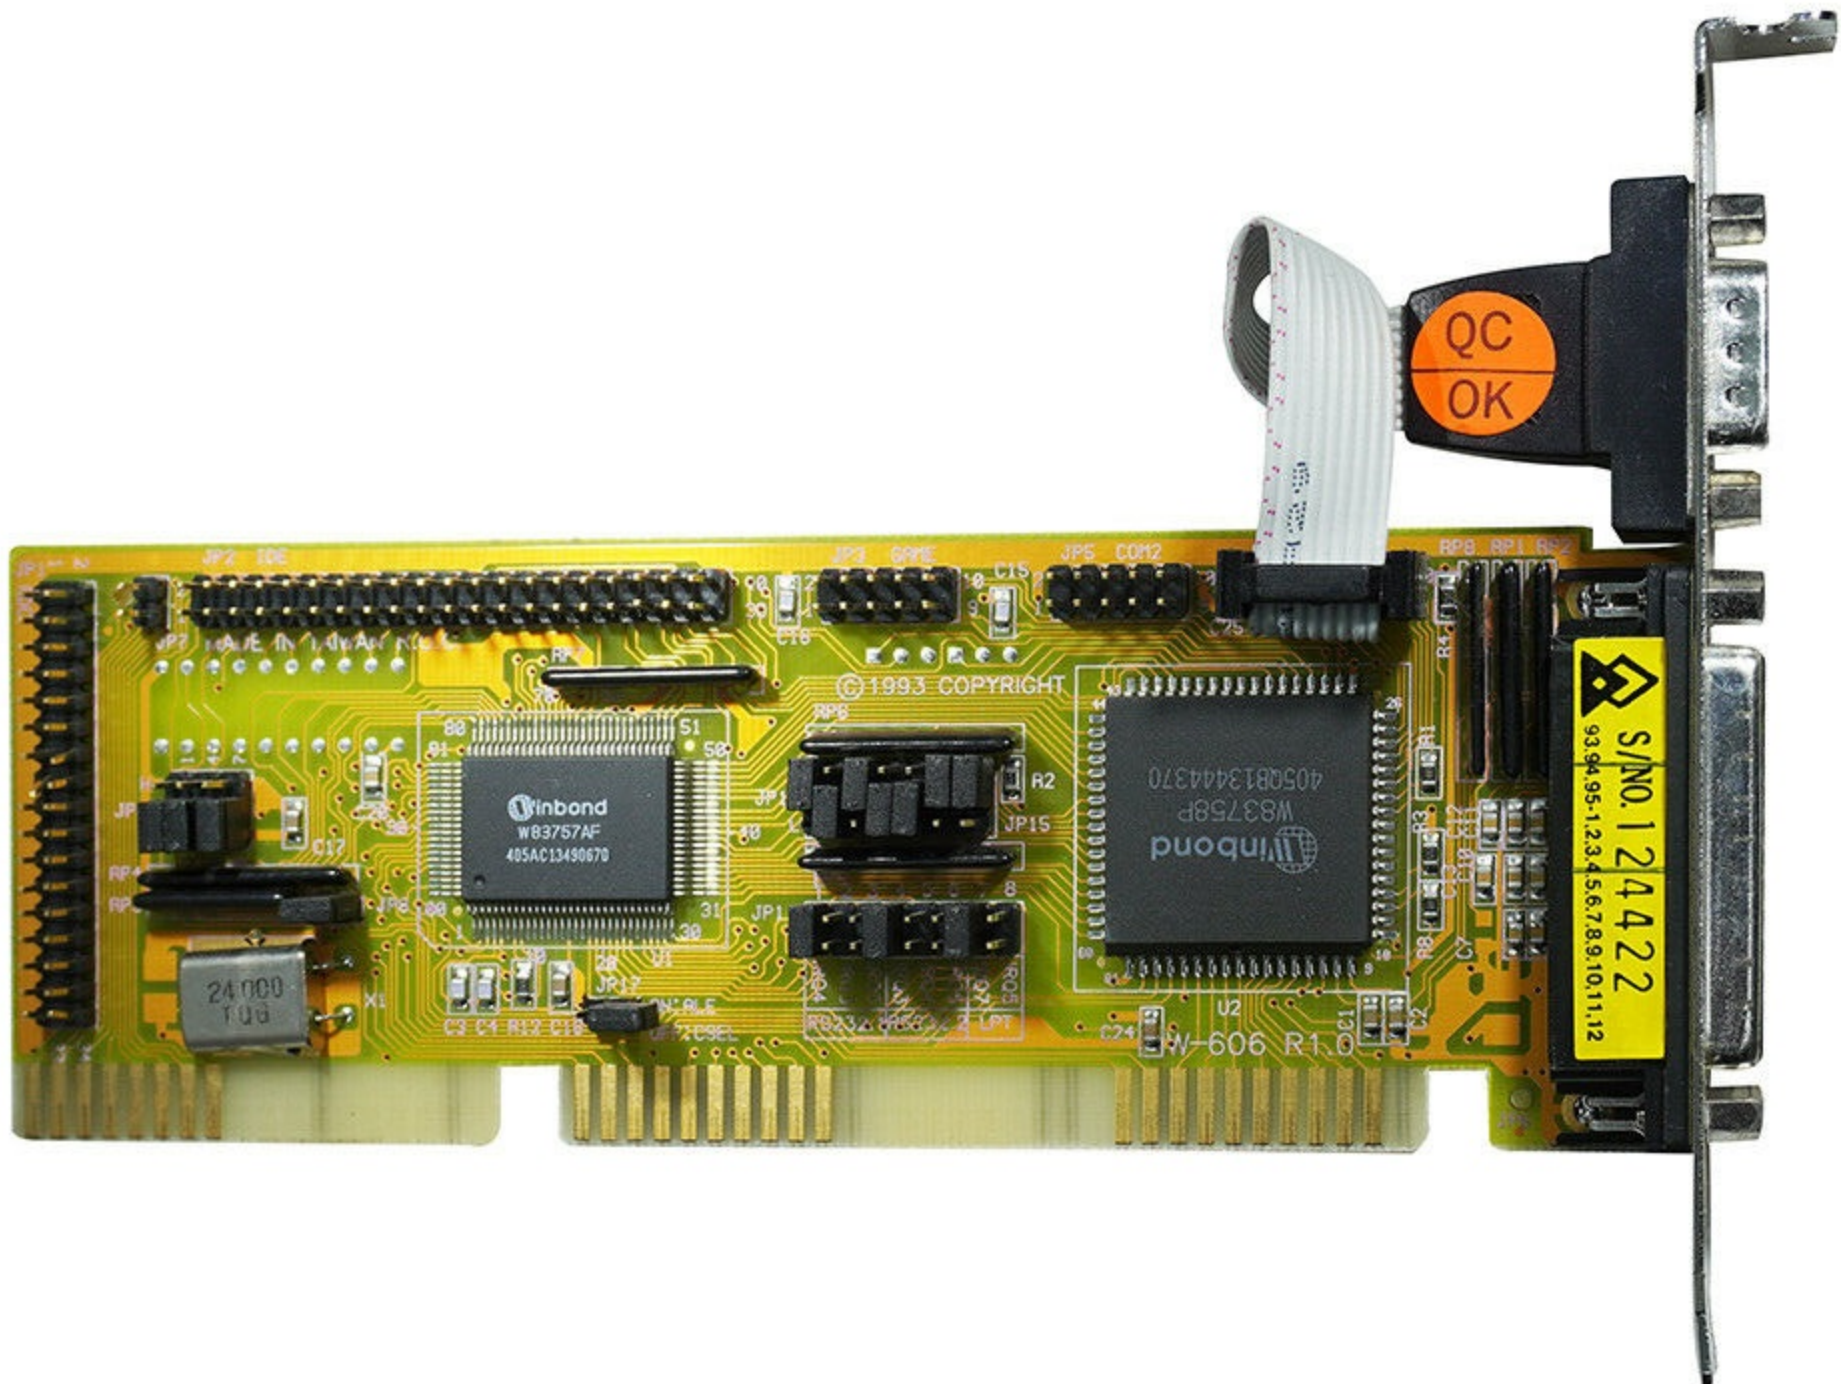

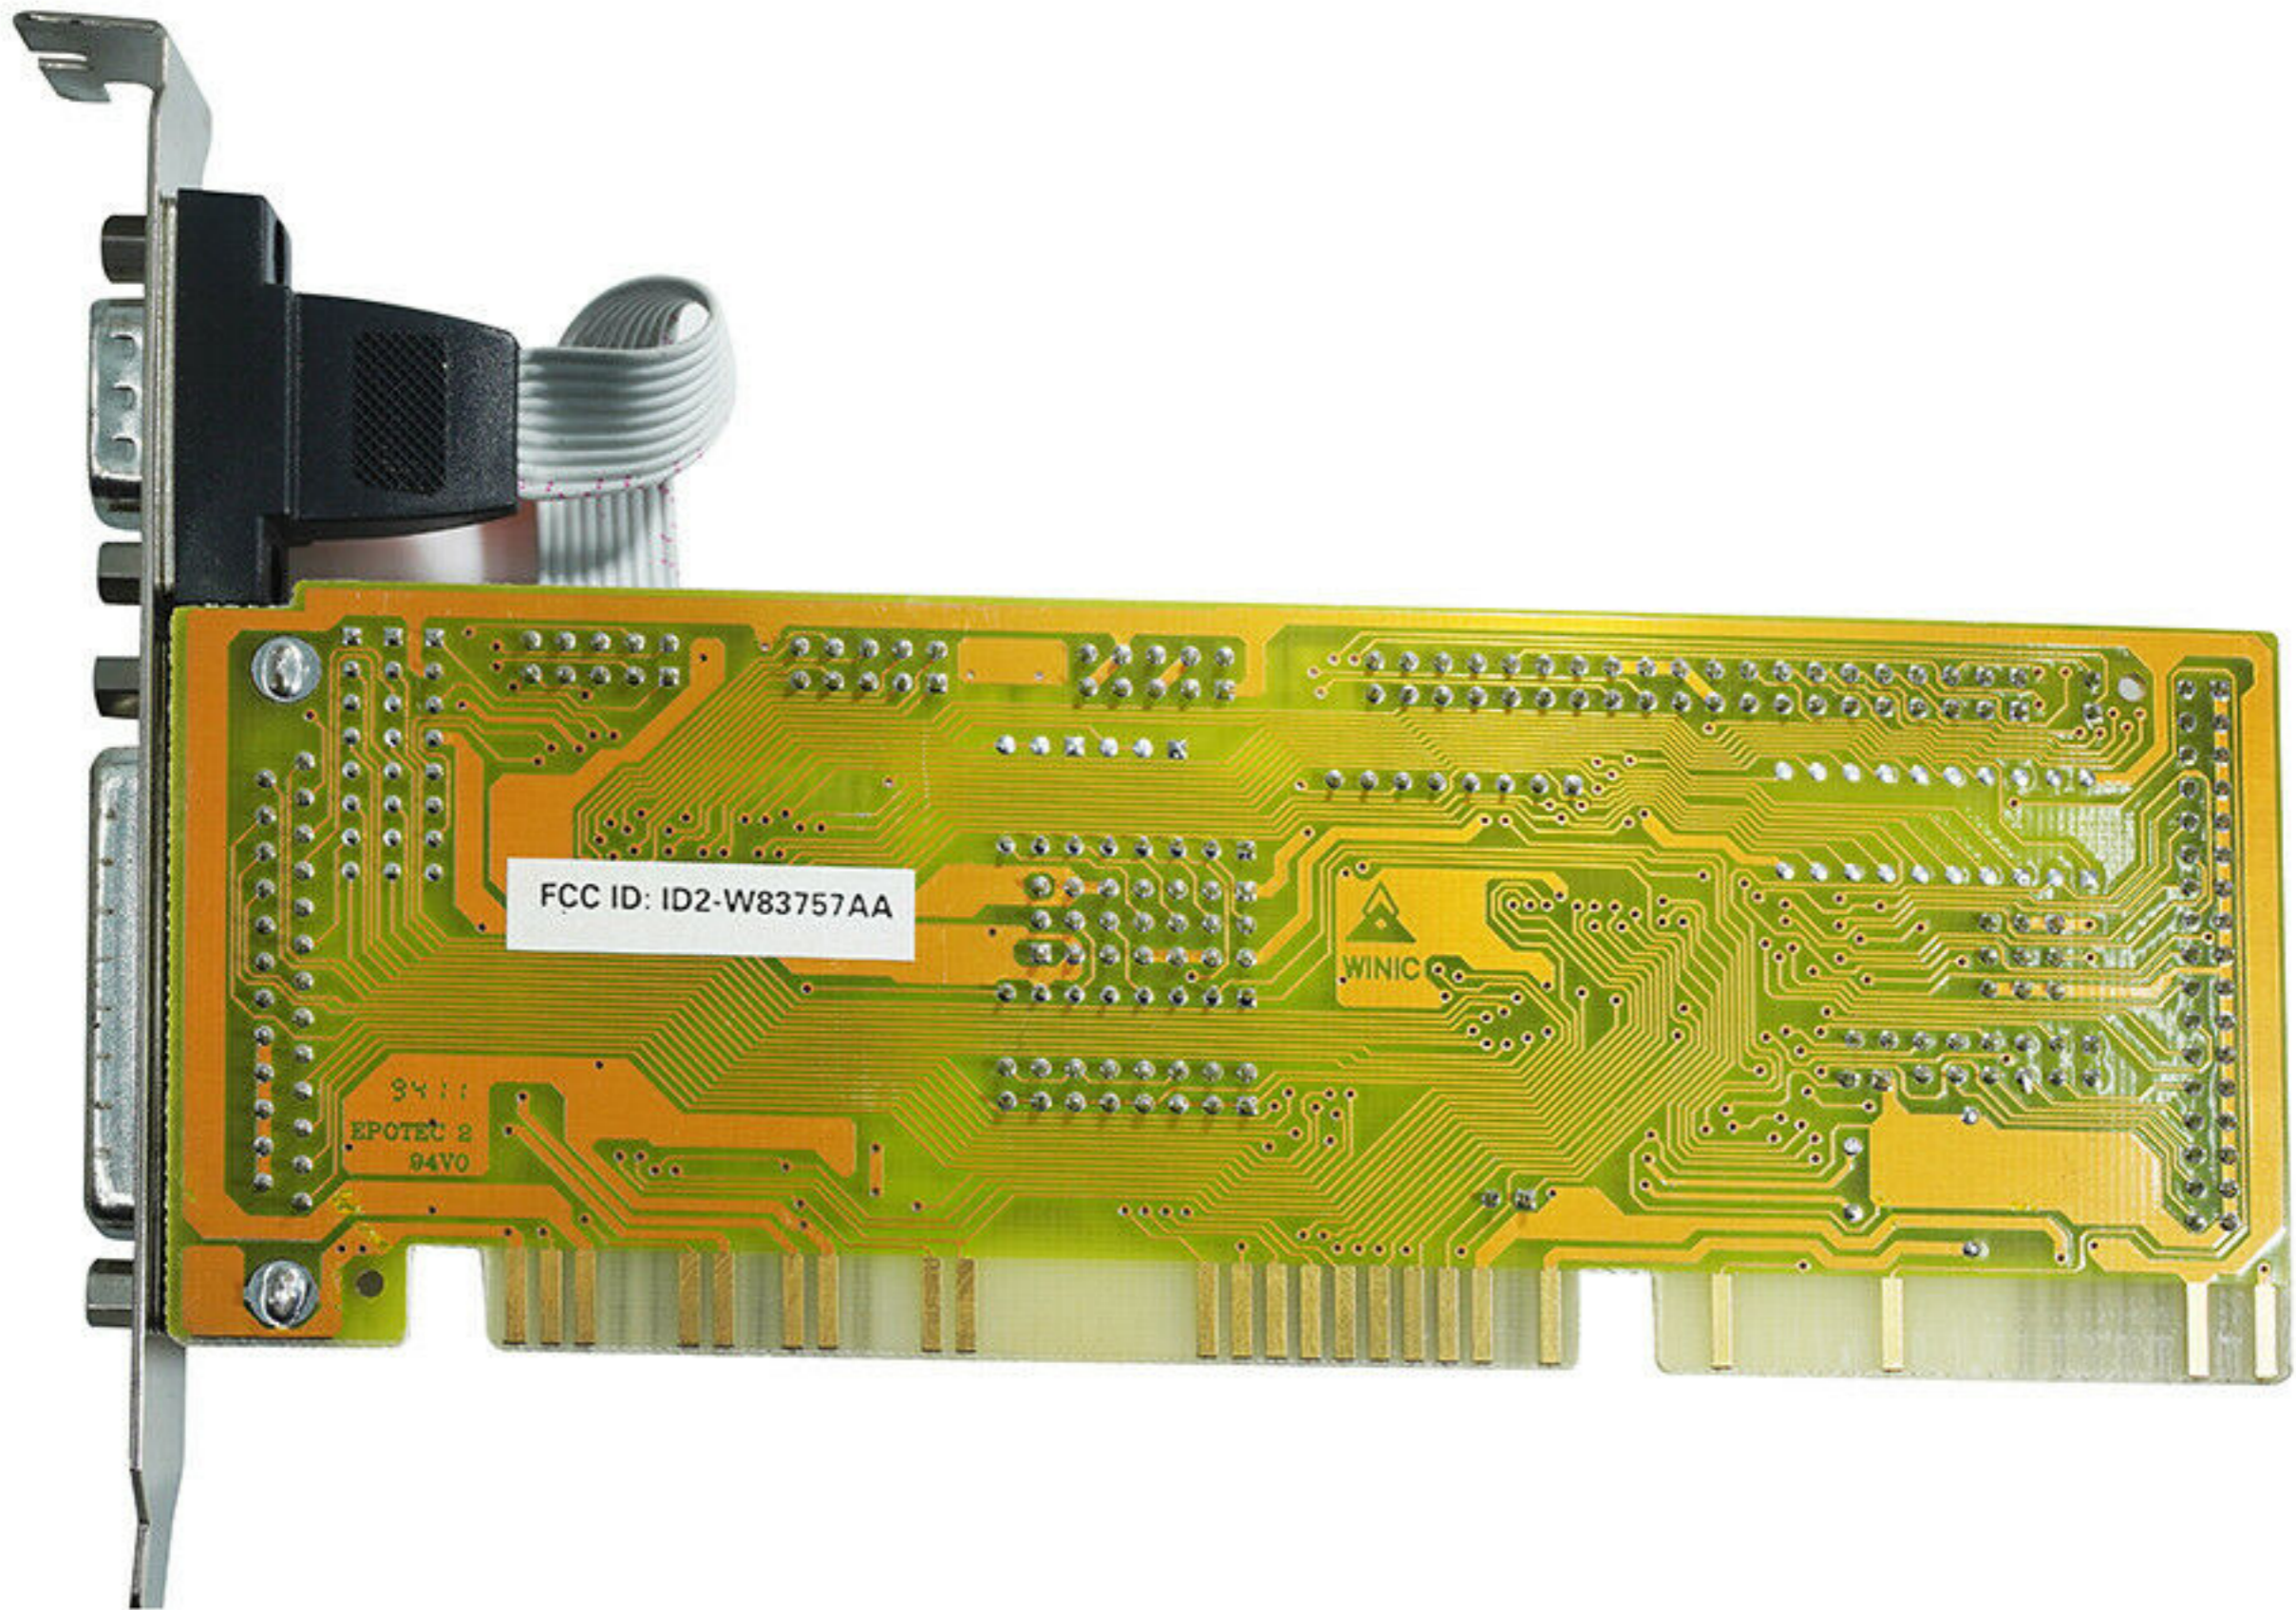

FCC ID: ID2-W83757AA



9411
EPOTEC 2
94V0